

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

net contents 1 litre

LL29701 7/23

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. May be harmful if swallowed. Causes skin irritation. Causes serious eye irritation. Toxic to aquatic life with long lasting effects.

PRECAUTIONS

AVOID BREATHING FUMES, VAPOURS, OR SPRAYS. DO NOT EAT, DRINK OR SMOKE WHILE USING.
Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Wear protective gloves and clothing, eye and face protection. Ground or bond container and receiving equipment. Use explosion-proof electrical, ventilating, lighting and intrinsically safe equipment. Use only non-sparking tools. Take precautionary measures against static discharge.

FIRST AID

IF SWALLOWED: Do NOT induce vomiting. Immediately call a physician or doctor.
IF ON SKIN (or hair): Wash skin with plenty of soap and water. If skin irritation or rash occurs get medical advice or attention. Remove all contaminated clothing and wash before reuse.
IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.
IF INHALED: Remove to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTRE, doctor or physician if you feel unwell.
If exposed or concerned get medical advice or attention. Call a POISON CENTRE or doctor/physician if you feel unwell. If medical advice is required have product container or label at hand. Further information can be obtained from
AUST: POISONS INFORMATION CENTRE 131 126
or call Resene 1800 738 383.
NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)
or call Resene 0800 737 363.
CONTAINS: 1-methoxy-2-propanol 385-425 g/L, Liquid Hydrocarbon 165-185 g/L, 2-butoxyethanol 165-185 g/L.
For use as a decorative/protective coating.
For full technical instructions see Data Sheet D58.

SPILLS: Use appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with Resene Brush Cleaner. Do not allow Resene Brush Cleaner to enter any drains. Refer to your local Council for disposal of dirty Resene Brush Cleaner.

FIRE: Use foam, carbon dioxide or dry chemical powder.

WARNING

KEEP OUT OF REACH OF CHILDREN

Resene

Concrete Stain

exterior/interior



**CONCRETE
CONSERVER
/TINT BASE**

Resene Concrete Stain is a solventborne stain designed specifically for concrete and other cementitious substrates and brick. Penetrates into the substrate imparting a decorative and protective finish.

Preparation

- Ensure substrates to be coated are in sound condition, dry, free from dirt, dust, loose material, oil (including mineral oil based wood finishes or similar) and salt.
- Remove accumulated windblown salt by washing with Resene Paint Prep and Housewash (see Data Sheet D812). If moss or mould is present, treat with Resene Moss & Mould Killer (see Data Sheet D80).
- See Resene Data Sheet D83 for surface preparation of polished or glossy concrete. Acid etching is recommended to open the surface and ensure good penetration of Resene Concrete Stain. New concrete must be allowed to cure for a minimum of 28 days before staining. Efflorescence on concrete **must be treated**.
- Waterblasting is the best surface preparation prior to coating of weathered cementitious surfaces.
- If oil and grease are present ensure the surface is thoroughly cleaned using Resene Paint Prep and Housewash.
- **All sanding dusts may be harmful and appropriate protection must be worn. In particular dusts from old lead or chromate based paints or old building materials containing asbestos may be injurious to health if inhaled or ingested. Seek expert advice if the presence of these materials is suspected.**
- This product may be used to stain a wide variety of surfaces. If the surface you propose to stain is unbound or not referred to, try a small test area first or contact your local Resene ColorShop or reseller for advice.
- Protect skin at all times with approved safety equipment.
- Stir thoroughly before and during use to ensure colour is evenly dispersed.


Application

- Apply two coats of Resene Concrete Stain allowing at least four hours between coats.
- Minimise overlap during brush or roller application to avoid lapmarks.
- Allow at least 24 hours after second coat before putting the area into full use.
- Additional coats may be applied to increase colour intensity.
- Take care to avoid excess film build up on top of the surface being coated to ensure best durability and resistance to mechanical damage.

Conserv

- Clear Resene Concrete Conserv is available for sealing quarry

- tiles, exposed aggregates, slate and concrete to protect the underlying substrate.

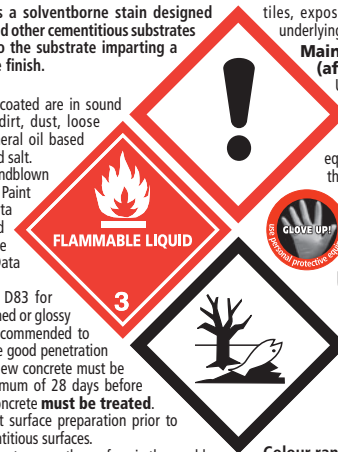

Maintenance
(after a minimum of four weeks' drying)
Use Resene Paint Prep and Housewash correctly diluted with water and a soft broom to clean down the surface.

Be PaintWise
For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.

UN NO. 1263 – PAINT RELATED MATERIAL

**FLAMMABLE LIQUID
AND VAPOUR**
Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

Colour range:

	Red Terracotta™	10CS10		Black™	10CS20
	Autumn Leaves™	20CS10		Deep Grey™	20CS20
	Sandy™	30CS10		Bleached Grey™	30CS20
	Bleached Sand™	40CS10		Clear Resene Concrete Conserv is also available	

Colours are as close as printing process allows. Always check a physical sample of the colour prior to purchasing to confirm your colour choice.

Quick check

Use on: Concrete, unglazed tiles, brick, cobblestones, driveways, paths, steps, patios, carports, garages, swimming pool surrounds and light industrial floors.
Gloss level: Penetrating stain. Finish is usually low sheen but may vary depending on surface porosity.
Coverage: Dependent upon surface porosity and profile. Typical coverage for concrete is 4.5–5.5 square metres per litre.
Dry time (minimum): 2 hours. Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions.
Recoat time (minimum): 4 hours.
Primer required: Dependent upon surface.
Usual number of coats: Two.
Application method: Brush, short nap synthetic fibre roller or spray.
Thinning: Do not thin.
Clean up: Resene Brush Cleaner.
Colour range: Standard colours shown on this label. Other colours may be available on request.
Before use: Silicone treatments may affect penetration. A test patch is recommended. Stir well with a wide flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.
In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 0800 737 363 (NZ) or visit the Resene website.



Concrete Stain SDS

Resene

the paint the professionals use



Concrete Stain TDS

In Australia: Resene Paints (Aust) Limited
7 Production Ave, PO Box 918, Ashmore City, QLD 4214
Ph 1800 738 383 Visit resene.com.au

In New Zealand: Resene Paints Limited
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045
Ph (04) 577 0500 Visit resene.co.nz