

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.

Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

WARNING
KEEP OUT OF REACH OF CHILDREN

Resene Squash Court Coating base

A-LL534048 7/17

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. Causes skin irritation. May cause an allergic skin reaction. Causes serious eye irritation. Harmful to aquatic life with long lasting effects.

PRECAUTIONS

AVOID BREATHING MISTS, VAPOURS, SPRAYS. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, either between 15°C-20°C or at a cool, constant temperature. Wear protective gloves and clothing, eye and face protection. Contaminated work clothing should not be allowed out of the workplace. Avoid release to the environment. Dispose of empty container safely. Consult Resene checklist on environmentally acceptable methods for cleaning equipment and disposing of unwanted paint.

FIRST AID

IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.

IF ON SKIN (or hair): Wash with plenty of soap and water. If skin irritation or rash occurs get medical advice or attention. Take off contaminated clothing and wash before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: Remove to fresh air and keep at rest in a position comfortable for breathing. If breathing becomes difficult, urgently seek medical attention.

If exposed or concerned: Call a POISON CENTRE, doctor or physician. When seeking medical advice take this container with you.

Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126

or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)

or call Resene 0800 737 363.

CONTAINS: Benzene-1,3-Dimethanamine 1-20 gms/L, Isophorone Diamine 1-20 gms/L.


For use as a decorative/protective coating.

For full technical instructions see Data Sheet RA406.

SPILLS: Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with the recommended thinner. Do not allow thinner to enter any drains. Refer to your local Council for disposal of dirty thinner.

Engineered Coating Systems

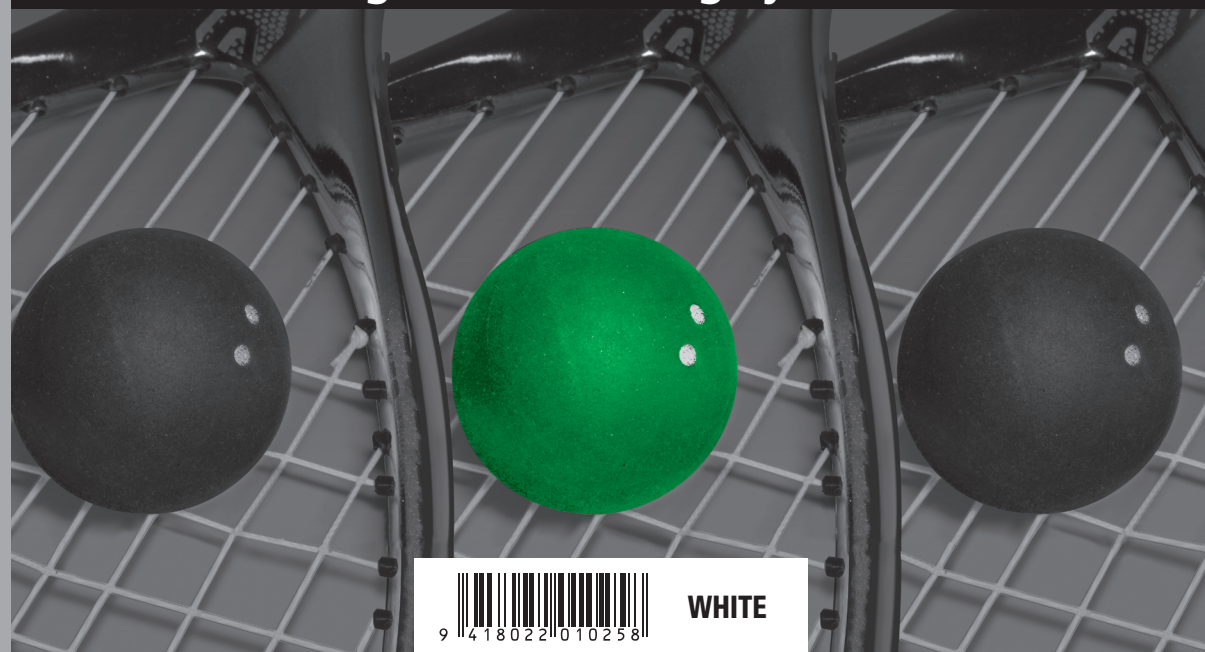

WHITE

net contents 4 litres

Must be mixed with the appropriate hardener.
Makes 6 litres when mixed with 2 litres of
Resene Aquapoxy Hardener.

Resene Squash Court Coating is a two pack waterborne epoxy especially developed for coating squash court walls.

General

- Safety Data Sheet (SDS) is available and must be consulted before use.

- In every case it is recommended that the current Resene Data Sheet is consulted for product data and surface preparation information.

- This product must be thoroughly mixed before use. Efficient mixing at all stages requires power mixing with an air or explosion proof mixer until uniformly blended.

- Thinning requirements may vary according to application method, equipment and environmental conditions.

- If thinning is required thoroughly re-mix using the power mixer.

- Ensure correct wet film thickness is applied to achieve desired dry film thickness. Allowance must be made for any thinner added.

- Use of incorrect thinner may have an adverse effect on application and performance.

- Drying is affected by low temperatures and high humidity.

- The temperature of the substrate should be 3°C above the "Dew Point".

- The "Dew Point" requirement can be presumed to be satisfied if a thin clearly defined film of water applied to the cleaned surface with a damp cloth evaporates within 15 minutes.

- Following appropriate preparation, all surfaces must be sound, dry and clean prior to painting.

- This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsound or not referred to, contact your local Resene ColorShop or Reseller for your nearest Technical Representative.

Be PaintWise

For tips on minimising the impact of your decorating on the environment see the Resene website.



Squash Court Coating Base SDS

Resene

the paint the professionals use



Squash Court Coating TDS

In Australia: Resene Paints (Aust) Limited
7 Production Ave, PO Box 924, Beenleigh, Qld 4207
Phone 1800 738 383 Fax 1800 064 960
Email advice@resene.com.au or visit www.resene.com.au

In New Zealand: Resene Paints Limited
Vogel Street, PO Box 38242, Wellington Mail Centre, Lower Hutt 5045
Phone (04) 577 0500 Fax (04) 577 0600
Email advice@resene.co.nz or visit www.resene.co.nz

Manufactured under a quality system certified as complying with ISO9001 by Telarc SAI, an accredited certification body. Printed on environmentally responsible paper, which complies with the requirements of environmental management systems EMAS and ISO14001, using vegetable-based inks.

Quick check

Name: Resene Squash Court Coating Base.

Generic type: Two component waterborne epoxy coating for squash court walls.

Colour: White (similar to NS 2660-4046), limited range of pastel colours.

Finish: Matt.

Primer required: No (cementitious substrates).

Application method: Brush, roller (Resene No.10 Waterborne Flooring Clears roller sleeve) or airless spray. Do not apply when temperatures are less than 10°C or above a relative humidity of 85%.

Mixing ratio: 2 parts Resene Squash Court Coating Base to 1 part Resene Aquapoxy Hardener (by volume). Mix only amount that can be applied within stated pot life.

Pot life: 3 hours at 20°C. Increased temperatures will shorten pot life. DO NOT APPLY MIXED PRODUCT BEYOND STATED POT LIFE AT A GIVEN TEMPERATURE.

Recommended dry film thickness (D.F.T.): 90 microns.

Theoretical coverage: 11 square metres per litre at 45 microns.

Dry time: Touch: 1 ½ hours at 20°C; Hard dry: 3 hours at 20°C (dry times at relative humidities less than 85%). Drying is affected by low temperatures and high humidity. Ensure courts are well ventilated post application, forced air ventilation or extraction systems may be required. Do not use gas or fuel burning heaters.

Recoat time (minimum): 24 hours at 20°C. Maximum: five days at 20°C.

Thinning and clean up: Water.

Resene Data Sheet: RA406.

Epoxies and polyaminoamides have been known to cause dermatitis and usual precautions to avoid skin contact should be taken.

AIRLESS SPRAY APPLICATION IS RECOMMENDED WHERE A SMOOTH FINISH IS REQUIRED.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. When using multiple packs of this product on the same project please mix them together before use. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.