


Resene colour charts are updated regularly. This colour chart file is part of the colour chart archive, which we provide so you can view Resene colours that have been available over the years. Most older colours can still be tinted – check with your Resene ColorShop team if you need an older colour for your project.

To view the latest Resene colour charts, visit [www.resene.com/colour-charts](http://www.resene.com/colour-charts)



**Resene**  
Tennis Court Coating

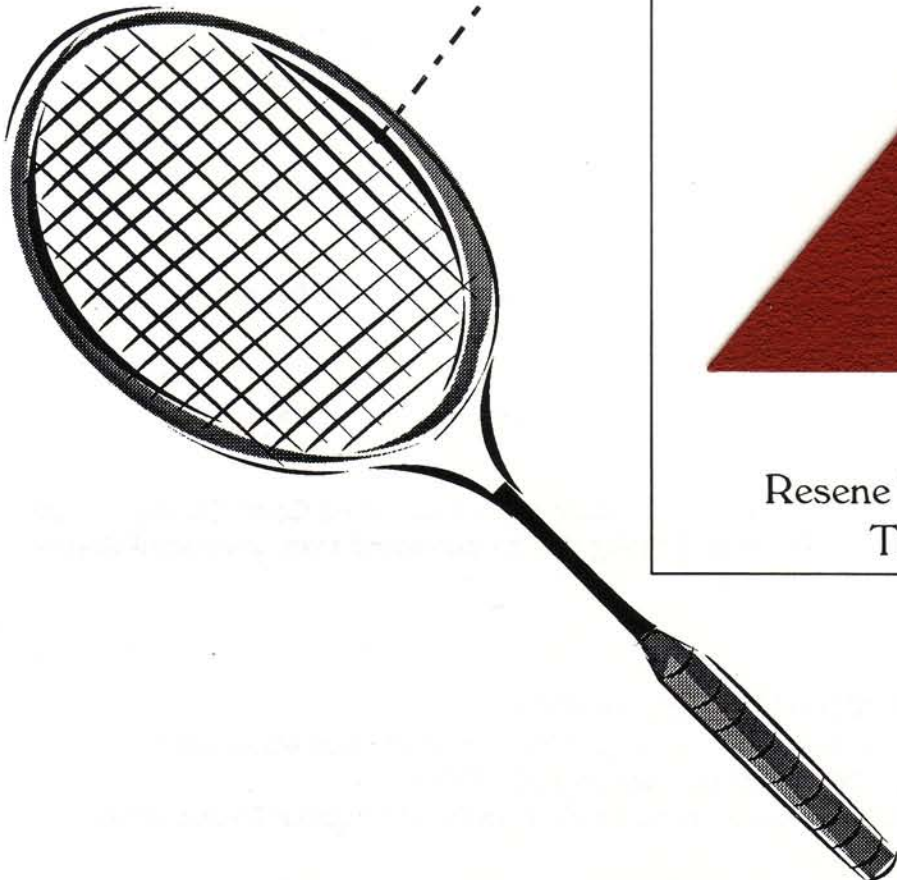

# Resene Tennis Court Coating

Resene Tennis Court Coating is a 100% acrylic coating filled with graded silicas designed for use on both concrete and composite courts to give a durable, tough topping with excellent traction and even bounce properties. It can be used to upgrade bare bitumen or bare concrete courts or to maintain previously painted tennis courts. Available in both green and terracotta.

Resene Tennis Court Coating is easy to apply by brush, synthetic fibre roller, spray or squeegee, and can be applied by either volunteers or professional contractors.

## To Upgrade from Bare Bitumen or Concrete Courts:

### Bare Bitumen:

- Clean surface using Resene Roof Wash and Paint Cleaner. Machine scrubbing will enhance removal of dirt and contaminants. Rinse clean with fresh water and allow to thoroughly dry.
- Apply one full coat of Resene Membrane Roofing Primer.
- Apply two full coats of Resene Tennis Court Coating, allowing at least 3 hours between coats.

### Bare Concrete:

- Clean surface using Resene Roof Wash and Paint Cleaner. Rinse clean with fresh water and allow to dry until free of excess surface water. Acid etch the damp surface with either hydrochloric acid diluted with 6 parts by volume of water, or phosphoric acid diluted with 10 parts by volume of water. (Consult manufacturer for details on acid etching). Rinse with fresh water until neutral or slightly alkaline to litmus. Allow to thoroughly dry.
- Apply two full coats of Resene Tennis Court Coating, allowing at least 3 hours between coats.

## To Repaint Previously Painted Courts:

Repaints require the existing coating to have good integrity and adhesion. Resene Tennis Court Coating should only be applied over old Resene Tennis Court Coating or similar products in sound condition. If this is not the case complete removal of the existing coating is required.

### Painted Bitumen:

- Clean surface using Resene Roof Wash and Paint Cleaner. Rinse clean with fresh water and allow to thoroughly dry.
- Spot prime any bare bitumen areas with Resene Membrane Roofing Primer.
- Apply two full coats of Resene Tennis Court Coating, allowing at least 3 hours between coats.

### Painted Concrete:

- Clean surface using Resene Roof Wash and Paint Cleaner. Rinse clean with fresh water and allow to thoroughly dry.
- Spot prime any bare concrete areas with Resene Smooth Surface Sealer.
- Apply two full coats of Resene Tennis Court Coating, allowing at least 3 hours between coats.

## Court Markings:

In all cases, we recommend Resene Lumbersider to paint court markings.

Refer to Product Data Sheet D303 for further technical information on Resene Tennis Court Coating, or call 0800 RESENE (0800 737 363). Resene Tennis Court Coating can be purchased from your local Resene ColorShop.

## Resene Paints Limited

32-50 Vogel Street, Lower Hutt, New Zealand. P.O. Box 38-242, Wellington Mail Centre.

Telephone: (04) 577 0500 Fax: (04) 577 0600

Email: [advice@resene.co.nz](mailto:advice@resene.co.nz) website: <http://www.resene.co.nz> Branches throughout New Zealand.