

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. This material is quite bland; with vapour, occasional skin contact and even minor ingestion having negligible hazard. Repeated skin contact may, and any eye contact will, cause irritation.

PRECAUTIONS

USE WITH ADEQUATE VENTILATION. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Avoid release to the environment.

FIRST AID

IF SWALLOWED: Rinse mouth. Call a POISON CENTRE, doctor or physician if you feel unwell.

IF ON SKIN (or hair): Rinse skin with plenty of soap and water. If skin irritation or rash occurs get medical advice or attention.

IF IN EYES: Rinse cautiously with water for several minutes. If eye irritation persists get medical advice or attention.

When seeking medical advice take this container with you.

Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126

or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766) or call Resene 0800 737 363.

For use as a decorative/protective coating.

For full technical instructions see Data Sheet D59.


SPILLS: Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible onto newspaper before washing brushes and rollers. Dispose of wash-up water onto grassy/unsealed area or into inside sink/basin, NOT into outside stormwater drain where it may harm fish in local waterways.

Resene

Aquaclear

waterborne urethane varnish interior

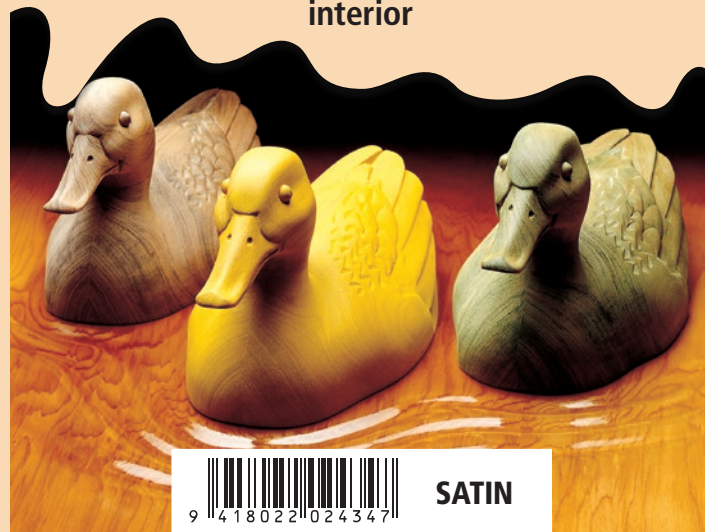

SATIN

Resene Aquaclear has been developed as a waterborne alternative to turps thinned oil modified urethanes to enhance and protect timber. Where maximum abrasion resistance is required, such as high traffic floors, a moisture-cured urethane, such as Resene Polythane, is recommended.

Preparation

- Ensure surfaces to be coated are in sound condition, dry, free from dirt, dust, loose material, oil and grease.
- If mould is present, treat with Resene Moss & Mould Killer (see Data Sheet D80).
- Stop all nail holes and cracked timber with a suitable filler.
- Thoroughly sand surfaces prior to coating. Finish off with fine sandpaper, remembering always to sand with the grain.
- Previously varnished surfaces must be sanded to remove all gloss and provide a key for good adhesion. If old varnish is flaking everything must be removed to ensure a uniform appearance.
- Thoroughly vacuum all surfaces to remove surface contaminants and sanding dusts. Pay special attention to residual floor polish in the gaps between tongue and groove flooring.

All sanding dusts may be harmful and appropriate protection must be worn. In particular dusts from old lead or chromate based paints or old asbestos containing building materials may be injurious to health if inhaled or ingested. Seek expert advice if the presence of these materials is suspected.

- This product may be used to coat a wide variety of surfaces. If the surface you propose to coat is unsound or not referred to, try a small test area first or contact your local Resene ColorShop or reseller for advice.

Application

- For uncoated surfaces thin first coat up to 10% with clean water.
- Stir thoroughly with a wide flat stirrer before and during use.
- Apply with a speed brush, synthetic bristle brush or Resene No.4 roller (product can be sprayed). Apply evenly.

Avoid working over a surface that has begun to set as this will give a patchy appearance.

- Allow at least two hours between coats.
- To avoid foaming of material, do not brush or roll excessively.
- Do not apply in direct sunlight.
- Requires 72 hours for coating to reach full cure. Use stockings feet on floor prior to full cure.
- Maintain good ventilation throughout the drying and post application curing period to ensure the paint is properly cured. This may require use of an extraction system when painting in marginal painting conditions. Do not use gas or diesel burners to heat coated area as these produce water that will inhibit drying and curing. Poor ventilation may affect appearance and performance.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information.



Aquaclear SDS

Resene

the paint the professionals use



Aquaclear TDS

In Australia: Resene Paints (Aust) Limited
7 Production Ave, PO Box 924, Beenleigh, Qld 4207
Ph 1800 738 383 Visit www.resene.com.au

In New Zealand: Resene Paints Limited
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045
Ph (04) 577 0500 Visit www.resene.co.nz

Manufactured under a quality system certified as complying with ISO9001 by Telarc SAI, an accredited certification body. Printed on environmentally responsible paper, which complies with the requirements of environmental management systems EMAS and ISO14001, using vegetable-based inks.

Quick check

Use on: Interior timber surfaces.

Gloss level: Satin, semi-gloss and gloss. Resene Aquaclear Natural is also available in a flat finish for timber walls and ceilings.

Coverage (average): 12 square metres per litre per coat. Spreading rates are given for bare timber – take care not to overspread on sealed surfaces.

Dry time (minimum): 30 minutes. Do not apply at temperatures below 10°C or when temperatures are liable to drop below this during the drying period. Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions.

Recoat time (minimum): 2 hours.

Primer required: No.

Usual number of coats: Three. New work – four minimum.

Application method: Speed brush is recommended. Can also be applied with synthetic bristle brush or sprayed.

Thinning and clean up: Water. First coat may be thinned with up to 10% clean water.

In hot and dry conditions: Application is difficult at high temperatures and low humidity. Up to 5% Resene Hot Weather Additive may be added.

Colour range: Turbid – dries clear.

Before use: Stir well with a wide flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.