

net contents 1 litre (Includes tinters in base)

Must be mixed with ArmourCat Hardener
in the correct volume ratio.

LLAC82301 6/11

WARNING

Read label before use. Keep out of reach of children. This material may be harmful if swallowed, inhaled or absorbed through the skin. Causes skin irritation. Suspected of damaging fertility or the unborn child. May cause damage to organs through prolonged or repeated exposure. Causes serious eye damage. DO NOT SWALLOW.

PRECAUTIONS

DO NOT BREATHE FUMES/MISTS/SPRAYS/VAPOURS. - USE WITH ADEQUATE VENTILATION. DO NOT EAT, DRINK OR SMOKE WHILE USING. Do not handle until all safety precautions have been read and understood. Store in original or correctly labelled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, either between 15°C-20°C or at a cool, constant temperature. Store locked up. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Wash thoroughly after handling. Wear protective gloves and eye/face protection. Avoid contact with skin and eyes. Dispose of empty container safely. Consult Resene checklist on environmentally acceptable methods for cleaning equipment and disposing of unwanted paint. Do not contaminate any water supply.

FIRST AID

IF SWALLOWED: Do NOT induce vomiting. Rinse mouth. Call a POISON CENTRE or doctor/physician if you feel unwell

IF ON SKIN (or hair): Remove/take off all contaminated clothing and wash before re-use. Wash skin with plenty of soap and water/shower. If skin irritation occurs get medical advice/attention

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do so. Continue rinsing.

INHALATION: Remove to fresh air. IF BREATHING DIFFICULT GET MEDICAL ATTENTION IMMEDIATELY.

IF EXPOSED OR CONCERNED: Get medical advice/attention.

When seeking medical advice take this container with you.

Further information can be obtained from

AUST. POISONS INFORMATION CENTRE 131 126

or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)

or call Resene 0800 737 363.

CONTAINS: Dimethyl benzene 100-200 gms/L, Methyl benzene 50-200 gms/L, 1-butanol 50-200 gms/L. Australia only Mixed Hydrocarbons 285-315 gms/L For use as a decorative/protective coating.

For full technical instructions see Data Sheet RA88.

SPILLS: Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with the recommended thinner. Do not allow thinner to enter any drains. Refer to your local Council for disposal of dirty thinner.

In case of fire: Use foam, CO2, dry chemical for extinction.

DANGER

KEEP OUT OF REACH OF CHILDREN


Resene

ArmourCat 823

gloss solid colour

base

Engineered Coating Systems

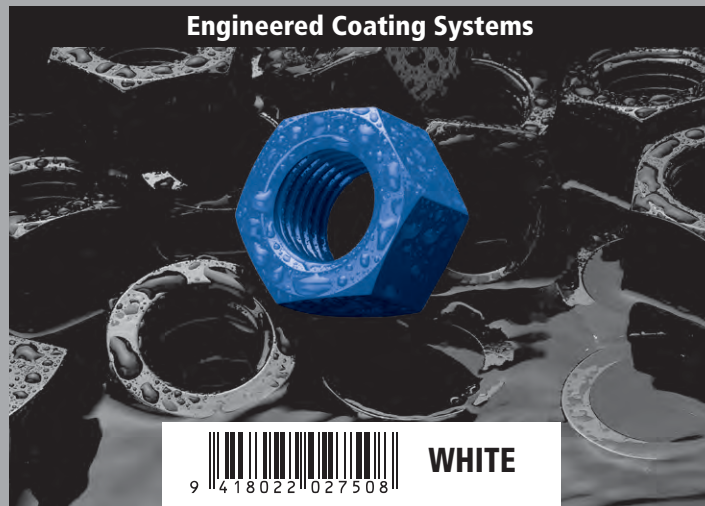

WHITE

Resene ArmourCat 823 is a two pack, acid-catalysed pigmented gloss finish for composite boards and timber.

General

- Safety Data Sheet (SDS) is available and must be consulted before use.
 - In every case it is recommended that the current Resene Data Sheet is consulted for product data and surface preparation information.
 - This product comprises a Base and Hardener, which must be mixed in the required ratio using an air or explosion-proof power mixer before application. Mix each component separately before blending them together. Add the total contents of the Hardener container to the total contents of the Base container. Once uniformly mixed, allow to stand for the recommended induction time prior to re-mixing and use.
 - Thinning requirements may vary according to application method, equipment and environmental conditions.
 - If thinning is required add recommended thinner after components have been blended and thoroughly re-mix using the power mixer.
 - Ensure correct wet film thickness is applied to achieve desired dry film thickness. Allowance must be made for any thinner added.
 - Use of incorrect thinner may have an adverse effect on application and performance.
 - Drying is affected by low temperatures and high humidity.
 - Ensure that the mixed product is used within the stated pot life. The pot life of the mixed product is given for a specific temperature. Higher temperatures will reduce the pot life, conversely lower temperatures will increase it.
 - The temperature of the substrate should be 3°C above the "Dew Point".
 - The "Dew Point" requirement can be presumed to be satisfied if a thin clearly defined film of water applied to the cleaned surface with a damp cloth evaporates within 15 minutes.
 - Following appropriate preparation, all surfaces must be dry and clean prior to painting.
 - This product may be used to paint a wide variety of surfaces.
- If the surface you propose to paint is unsound or not referred to, contact your local Resene ColorShop or Reseller for your nearest Technical Representative.

Be PaintWise

For tips on minimising the impact of your decorating on the environment see the Resene website.



UN NO. 1263 – PAINT RELATED MATERIAL

FLAMMABLE LIQUID AND VAPOUR

Keep away from heat/sparks/open flames/
hot surfaces. No smoking

Resene

the paint the professionals use

In Australia: Resene Paints (Aust) Limited
7 Production Ave, PO Box 785, Ashmore City, Queensland, 4214
Phone 1800 738 383 Fax 1800 064 960
Email advice@resene.com.au or visit www.resene.com.au

In New Zealand: Resene Paints Limited
Vogel Street, PO Box 38242, Wellington Mail Centre, Lower Hutt 5045
Phone (04) 577 0500 Fax (04) 577 0600
Email advice@resene.co.nz or visit www.resene.co.nz

Manufactured under a quality system certified as complying with ISO9001 by Telarc SA, an accredited certification body. Printed on environmentally responsible paper, which complies with the requirements of environmental management systems EMAS and ISO14001, using vegetable-based inks.

Quick check

Name: Resene ArmourCat 823.

Generic type: Acid catalysed alkyd urea resin system.

Colours: White, selected BS381C, BS2660, BS5252, Resene Total Colour System, The Range and Whites & Neutrals.

Finish: Gloss.

Sealer/undercoat required: Resene ArmourCat 805 (New MDF/Wood).

Application method: Spray application only - refer Resene Automotive before commencing work.

Mixing ratio: 10 parts Base: 1 part Hardener (by volume).

Induction time: 5-15 minutes.

Pot life: 8 hours at 18°C. Increased temperatures will shorten pot life.

Volume solids: (Mixed, unthinned) 47%.

Theoretical coverage: 10 square metres per litre per coat. Coverage rates will vary according to substrate porosity.

Dry time (minimum): Tack free: 10-15 mins at 18°C.
To sand: 2 hours at 18°C.

Recoat: Minimum: 2 hours at 18°C
Maximum: 7 days at 18°C.

Drying is affected by low temperatures and high humidity.

Thinning: Resene Thinner No. 15.

Clean up: Water

Resene Data Sheet: RA88.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. For further painting advice and information, call 1800 738 383 (AUST), 0800 RESENE (NZ) or visit the Resene website.