

WARNING

KEEP OUT OF REACH OF CHILDREN

Resene

Pre-Coated Steel Primer

solventborne exterior for cladding and roofing

A-LL3930004 9/18

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. May be harmful if swallowed. Causes skin irritation. Causes serious eye irritation. May cause an allergic skin reaction. Suspected of causing cancer. May cause damage to organs through prolonged or repeated exposure. Toxic to aquatic life. Harmful to aquatic life with long lasting effects.

PRECAUTIONS

DO NOT BREATHE DUST, FUMES, GAS, MISTS, VAPOURS, OR SPRAYS. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Store locked up. Wear protective gloves and clothing, eye and face protection. Ground and bond container and receiving equipment. Use explosion-proof electrical, ventilating, lighting and intrinsically safe equipment. Use non-sparking tools. Take action to prevent static discharge.

FIRST AID

IF SWALLOWED: Rinse mouth. Call a POISON CENTRE, doctor or first aider if you feel unwell.

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation or rash occurs get medical advice or attention.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: Remove to fresh air and keep at rest in a position comfortable for breathing.

Call a POISON CENTRE, doctor or first aider if you feel unwell.

If exposed or concerned, get medical advice or attention.

When seeking medical advice take this container with you.

Further information can be obtained from
AUST: POISONS INFORMATION CENTRE 131 126 or call Resene 1800 738 383.
NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)

or call Resene 0800 737 363.

CONTAINS: Methyl Ethyl Ketoxime 1-10 gms/L.

For use as a surface preparation coating.

For full technical instructions see Data Sheet D413.


SPILLS: Clean up spillage. Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with Resene Brush Cleaner or mineral turps. Do not allow mineral turps to enter any drains.

Refer to your local Council for disposal of dirty mineral turps.

FIRE: Use foam, carbon dioxide or dry chemical powder.

Use on
COLORBOND®,
COLORCOTE® and
other pre-coated
steel

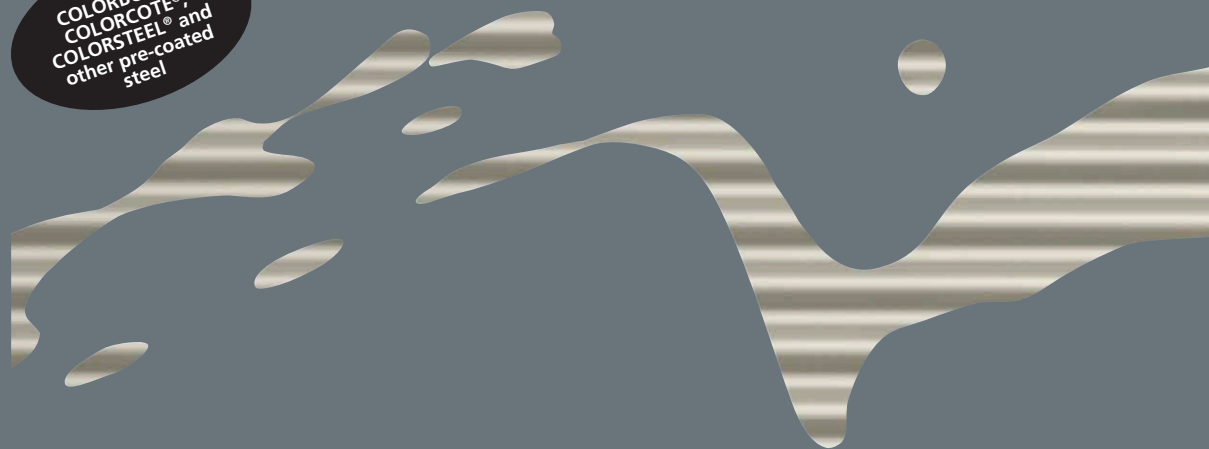

OFF WHITE

Resene Pre-Coated Steel Primer is a single pack adhesion primer for application to new factory coated roofing and cladding to ready it for topcoating with Resene waterborne paints. Can also be used as an anti-corrosive primer for new or weathered Zinalume and galvanising where a solventborne cool primer is required to maximise heat reflection when topcoating with Resene CoolColours. Suitable for exterior use on horizontal and vertical applications, including roofs, walls and fences.

Preparation

- Ensure surfaces to be painted are in sound condition, dry, free from dirt, dust, loose material and salt. Remove accumulated windblown salt by washing with Resene Heavy Duty Paint Prep & Oil Remover (see Data Sheet D816).

- Waterblasting is the best surface preparation prior to repainting of weathered galvanised steel and Zinalume.

- If mould is present, treat with Resene Moss & Mould Killer (see Data Sheet D80).

- If roof is used for the collection of drinking water disconnect downpipes until total paint system has been applied and has received its first heavy shower of rain. Divert run-off water to a grassed area for the first two to three showers.

- **All sanding dusts may be harmful and appropriate protection must be worn. In particular dusts from old lead or chromate based paints or old building materials containing asbestos may be injurious to health if inhaled or ingested. Seek expert advice if the**

presence of these materials is suspected.

- Consult your Resene ColorShop or reseller for technical advice on painting of badly rusted roofs.
- This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsound or not referred to, contact your local Resene ColorShop or reseller.

Application

- Apply by brush, roller or airless spray.
- Resene Pre-Coated Steel Primer is best applied by brush to ensure full surface wetting of substrate is achieved.
- Galvanised steel or Zinalume should not be allowed to weather. Apply Resene Pre-Coated Steel Primer as soon as practical after erection.

Overcoating

- For new work apply one full coat of Resene Pre-Coated Steel Primer and allow 12 hours before recoating.
- For severe coastal environment apply a second coat of Resene Pre-Coated Steel Primer.
- Resene Pre-Coated Steel Primer has been developed for use under most waterborne roof and exterior paints.

- For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information.



UN NO. 1263 – PAINT RELATED PRODUCT

FLAMMABLE LIQUID AND VAPOUR

Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking



Pre-Coated Steel Primer SDS

Resene

the paint the professionals use



Pre-Coated Steel Primer TDS

In Australia: Resene Paints (Aust) Limited
7 Production Ave, PO Box 924, Beenleigh, Qld 4207
Ph 1800 738 383 Visit www.resene.com.au

In New Zealand: Resene Paints Limited
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045
Ph (04) 577 0500 Visit www.resene.co.nz

Manufactured under a quality system certified as complying with ISO9001 by Telarc SA, an accredited certification body. Printed on environmentally responsible paper, which complies with the requirements of environmental management systems EMAS and ISO14001, using vegetable-based inks.

net contents 4 litres

Quick check

Use on: Factory coated steel cladding/roofing.

Gloss level: Low gloss.

Coverage: 12 square metres per litre per coat.

Dry time (minimum): 5 hours at 18°C. Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions.

Recoat time (minimum): 12 hours at 18°C.

Usual number of coats: Usually one.

Application method: Brush, roller or airless spray.

Thinning and clean up: Resene Thinner No.2 or mineral turps.

Colour range: Off white.

Before use: Stir well with a wide flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. When using multiple packs of this product on the same project please mix them together before use. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.