

net contents 1 litre

LL25201 2/18

**SAFETY PRECAUTIONS**

Read label before use. Keep out of reach of children. Causes mild skin irritation. Causes serious eye irritation. May cause an allergic skin reaction. Suspected of causing cancer. Suspected of damaging fertility or the unborn child. Toxic to aquatic life with long lasting effects.

**PRECAUTIONS**

DO NOT BREATHE MISTS, VAPOURS, OR SPRAYS. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Store locked up. Wear protective gloves and clothing, eye and face protection. Use personal protective equipment as required. Ground or bond container and receiving equipment. Use explosion-proof electrical, ventilating, lighting and intrinsically safe equipment. Use only non-sparking tools. Avoid release to the environment. Dispose of empty container safely. Consult Resene checklist on environmentally acceptable methods for cleaning equipment and disposing of unwanted paint.

**FIRST AID**

IF SWALLOWED: If ingested give water to dilute. Do not cause vomiting. Get medical attention without delay.

IF ON SKIN (or hair): Remove immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation or rash occurs get medical advice or attention. Wash contaminated clothing before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: Remove to fresh air and keep at rest in a position comfortable for breathing.

If exposed or concerned get medical advice or attention.

When seeking medical advice take this container with you.

Further information can be obtained from  
AUST: POISONS INFORMATION CENTRE 131 126

or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)

or call Resene 0800 737 363.

CONTAINS: Methyl Ethyl Ketoxime 1-5 gms/L Xylene 10-100gms/L.

For use as a decorative/protective coating.

For full technical instructions see Data Sheet D52.

**SPILLS:** Clean up spillage. Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

**CLEANING PAINT EQUIPMENT:** Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with Resene Brush Cleaner or mineral turps. Do not allow mineral turps to enter any drains. Refer to your local Council for disposal of dirty mineral turps.

**FIRE:** Use foam, carbon dioxide or dry chemical powder.


**WARNING**

KEEP OUT OF REACH OF CHILDREN

**Resene**

**Qristal Clear  
polyurethane**

interior

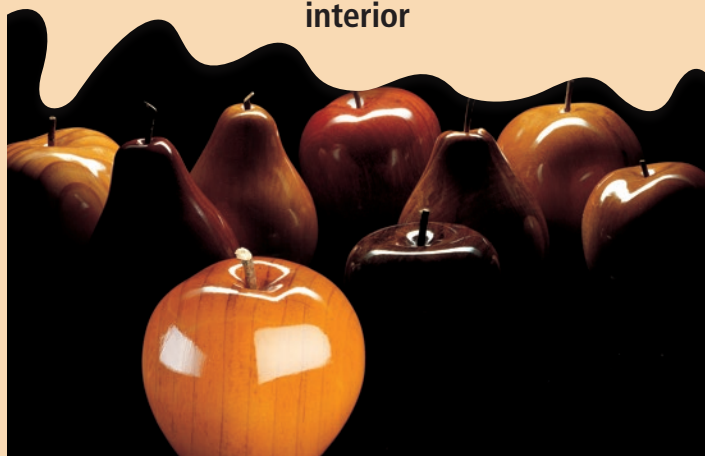

**SATIN**

Resene Qristal Clear is a range of hardwearing single pack polyurethanes. Designed using the most modern urethane resin for ease of application and maximum flow. Resene Poly-Flat produces a low sheen wax-like finish with excellent grain filling and sanding properties. Resene Poly-Satin produces a rich hardwearing semi-gloss finish with excellent sanding properties. Resene Poly-Gloss dries to an extremely hard high gloss finish (the wet look). Best applied over Resene Poly-Flat or Resene Poly-Satin. This lower odour formulation is easy to apply and dries to a smooth clear finish without the unwanted and strong solvent odours associated with traditional solventborne products. Where a harder wearing surface is required, substitute Resene HD Poly-Satin for Resene Poly-Satin, or the full gloss Resene Polythane (see Data Sheet D53) for Resene Poly-Gloss.

**Preparation**

- Surfaces must be completely dust free and dry. Vacuum clean to remove dirt, dust and loose material.
- If mould is present, treat with Resene Moss & Mould Killer (see Data Sheet D80).
- Stop all nail holes and cracked timber with putty or a suitable filler matched to the required colour.
- Thoroughly sand surfaces prior to coating. Finish off with fine sandpaper, remembering always to sand with the grain. Previously varnished surfaces must be sanded to remove all gloss and provide a key for good adhesion.
- All sanding dusts may be harmful and appropriate protection must be worn. In particular dusts from old lead or chromate based paints or old building materials containing asbestos may be injurious to health if inhaled or ingested. Seek expert advice if the presence of these materials is suspected.

This product may be used to coat a wide variety of surfaces. If the timber you propose to coat is not referred to, try a small test area first or contact your local Resene ColorShop or Reseller for advice.

**Priming**

- On bare Totara or Matai apply one coat of Resene Aquadecor Gloss (see Data Sheet D59).
- On any bare fibre or particle boards apply one coat of Resene Aquadecor. Allow 16 hours before recoating.

**Application**

- Apply one full coat of Resene Qristal Clear Poly-Flat or Poly-Satin to bare timber and lay off in direction of grain. Allow 12 hours to dry.
- Apply one coat of Resene Qristal Clear Poly-Flat, Poly-Satin or Poly-Gloss allowing 12 hours between coats.
- Lightly sand between coats with fine sandpaper.
- Apply final coat of Resene Qristal Clear Poly-Flat, Poly-Satin or Poly-Gloss.
- For recoats apply one or two coats of the desired Resene Qristal Clear finish.
- Maintain good ventilation throughout the drying and post application curing period to ensure the paint is properly cured. This may require use of an extraction system when painting in marginal painting conditions.

Do not use gas or diesel burners to heat coated area as these produce water that will inhibit drying and curing. Poor ventilation may affect appearance and performance.

**Be PaintWise**

For tips on responsible disposal of paint and minimising the impact of your decorating on the environment see the Resene website. Recycle with Resene PaintWise (NZ) or paintback.com.au (Australia).



UN NO. 1263 – PAINT

**FLAMMABLE LIQUID AND VAPOUR**

Keep away from heat, sparks, open flames and hot surfaces. No smoking.



**Resene**

the paint the professionals use



**In Australia:** Resene Paints (Aust) Limited  
7 Production Ave, PO Box 924, Beenleigh, Qld 4207  
Phone 1800 738 383 Fax 1800 064 960  
Email advice@resene.com.au or visit www.resene.com.au

**In New Zealand:** Resene Paints Limited  
Vogel Street, PO Box 38242, Wellington Mail Centre, Lower Hutt 5045  
Phone (04) 577 0500 Fax (04) 577 0600  
Email advice@resene.co.nz or visit www.resene.co.nz

Manufactured under a quality system certified as complying with ISO9001 by Telarc SAI, an accredited certification body. Printed on environmentally responsible paper, which complies with the requirements of environmental management systems EMAS and ISO14001, using vegetable-based inks.

**Quick check**

**Use on:** Interior timber surfaces.

**Gloss level:**

Poly-Flat: a low sheen wax-like finish.  
Poly-Satin: a rich hardwearing semi-gloss finish.  
Poly-Gloss: an extremely hardwearing high gloss finish, best applied over Poly-Flat or Poly-Satin.  
HD Poly-Satin is available in a semi-gloss finish only.  
**Coverage:** 16 square metres per litre per coat.

**Dry time (minimum):** 4 hours. Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions.

**Recoat time (minimum):** 12 hours.

**Primer required:** Dependent on surface.

**Usual number of coats:** Three.

**Application method:** Brush, synthetic fibre roller or spray.

**Thinning and clean up:** Resene Thinner No.2 (lower odour) or Mineral turps (brush/roller); Resene Thinner No.9 (spray).

**Colour range:** Stain timber with Resene Colorwood (see Data Sheet D50a) before applying Resene Qristal Clear.

**Before use:** Stir well with a wide flat stirrer.

Enjoy the Resene Promise of Quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.