

DANGER

KEEP OUT OF REACH OF CHILDREN

Resene

**Quick2Clean
Paint Equipment**

net
contents
1 litre

designed for spray equipment
and as a brush conditioner for waterborne paints

net contents 1 litre LL8468901B 11/23

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. Causes skin irritation. Causes serious eye damage. Toxic to aquatic life with long lasting effects.

PRECAUTIONS

DO NOT EAT, DRINK OR SMOKE WHEN USING THIS PRODUCT.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Wear protective gloves and clothing, eye and face protection. Wash all exposed external body areas thoroughly after handling. Avoid release to the environment.

FIRST AID

IF SWALLOWED: Rinse mouth. Do NOT induce vomiting. Call a POISON CENTRE, doctor or first aider if you feel unwell. IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTRE, doctor or first aider if you feel unwell. IF ON SKIN (or hair): Wash with plenty of water. If skin irritation occurs get medical advice or attention. Take off contaminated clothing and wash before reuse. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

Further information can be obtained from AUST: POISONS INFORMATION CENTRE 131 126 or call Resene 1800 738 383. NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766) or call Resene 0800 737 363. If medical advice is needed: have product container at hand. CONTAINS: Sodium Dioctyl Sulfosuccinate 10-110 g/L. For use as a cleaner. For full technical instructions see Data Sheet D818.

Resene Quick2Clean Paint Equipment is designed to make cleaning spray equipment quick and easy to help you maintain and maximise the life of your spray gear. It is also suitable as a conditioner for brushes used with waterborne paints to help you care for your brushes.

How to use

Protect skin and eyes at all times with approved safety equipment.

Spray equipment

For best results, follow these steps:

1. Flush your unit with water to remove paint from the unit and hose.
2. Drop the pressure and remove all filters. Clean them with correctly diluted Resene Quick2Clean Paint Equipment and store them safely in your toolbox.
3. Put the unit back together without the filters. Clean excess paint off the pick-up shaft with correctly diluted Resene Quick2Clean Paint Equipment.
4. Remove the dirty water and replace with a bucket of fresh water, using warm if possible. Add 2 capfuls of Resene Quick2Clean Paint Equipment to 5 litres of warm water. Flush through the unit until clean.
5. Mix a small amount of fresh water in a bucket with Resene Pump Protector. Run through your unit.
6. Drop the pressure and store your unit.
7. BADLY CLOGGED HOSES AND OR FILTERS MAY REQUIRE REPLACEMENT.

For brushes/rollers used with waterborne paints

1. If paint is still soft, work diluted Resene Quick2Clean Paint Equipment well into the bristles/roller sleeve.

2. Rinse off in clean cold water. All residues must be removed (e.g. no foaming when the wet roller sleeve is vigorously rubbed) to prevent application problems.

3. If a second treatment is required remove as much water as possible before repeating Step 1.

4. Badly clogged brushes may require soaking overnight in Resene Brush Cleaner. Place in a suitable solvent-proof container. Cover bristles/sleeve with Resene Brush Cleaner and cover with oven foil or a wet rag. Leave 12-24 hours. Scrape through with a metal comb or wire brush and repeat steps 1 and 2.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.


Please ensure that use of this product is compatible with the equipment being cleaned. Resene does not accept any responsibility for the use of incorrect product. Read the appropriate Data Sheet and Safety Data Sheet before application.



Quick2Clean Paint Equipment SDS



Quick2Clean Paint Equipment TDS

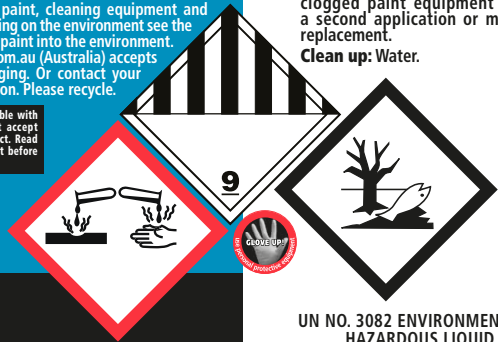

Quick check

Use on: Spray equipment, brushes, roller sleeves.

Appearance: Hazy pale orange/yellow liquid.

Mixing ratio: Add 2 capfuls of Resene Quick2Clean Paint Equipment to 5 litres of warm water. One capful = 15 mL.

No. of applications: Usually one. Badly clogged paint equipment may need a second application or may require replacement.

Clean up: Water.



UN NO. 3082 ENVIRONMENTALLY HAZARDOUS LIQUID

In Australia: Resene Paints (Aust) Limited
7 Production Ave, PO Box 918, Ashmore City, QLD 4214
Ph 1800 738 383 Visit resene.com.au

Resene
the paint the professionals use

In New Zealand: Resene Paints Ltd
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045
Ph 04 577 0500 Visit resene.co.nz