

WARNING

Read label before use. Keep out of reach of children. Harmful if swallowed. May be fatal if swallowed and enters airways. Toxic if inhaled. May cause respiratory irritation. May be harmful in contact with skin. Causes skin irritation. May cause an allergic skin reaction. Causes serious eye irritation. May damage fertility or the unborn child. May cause drowsiness or dizziness. May cause damage to organs through prolonged or repeated exposure. Toxic to aquatic life with long lasting effects. Harmful to the soil environment. Harmful to terrestrial vertebrates.

PRECAUTIONS

DO NOT BREATHE FUMES/MISTS/SPRAYS/VAPOURS. DO NOT EAT, DRINK, OR SMOKE WHEN USING THIS PRODUCT.

Store in original or correctly labelled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, either between 15°C-20°C or at a cool, constant temperature. Use only outdoors or in a well ventilated area. Wear protective gloves/ protective clothing/ eye and face protection. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting/intrinsically safe equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Contaminated work clothing should not be allowed out of the workplace. Wash contaminated clothing before re-use. Dispose of empty container safely. Consult Resene checklist on environmentally acceptable methods for cleaning equipment and disposing of unwanted paint. Collect spillage. Avoid release to the environment. Obtain special instructions before use.

FIRST AID

IF SWALLOWED: Rinse mouth. Do NOT induce vomiting. Immediately call a POISON CENTRE or doctor/physician/first aider.

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Wash with plenty of soap and water. If skin irritation or rash occurs. Get medical advice/attention.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do so. Continue rinsing. If eye irritation persists: Get medical attention/advice.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. If experiencing respiratory symptoms: Call a POISON CENTRE or doctor/physician.

If exposed or concerned: Call a POISON CENTRE or doctor/physician.

If medical attention is required: Have product container or label at hand.

When seeking medical advice take this container with you.

Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126 or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)

or call Resene 0800 737 363.

For use as a surface preparation coating.

For full technical instructions see Data Sheet D48.

CONTAINS: Xylene 110-125 gms/L, Toluene 40 gms/L, dibutyl phthalate 15-20 gms/L, 3-iodo-2-propynyl butyl carbamate <5 gms/L, 2-(thiocyanomethylthio) benzothiazole <2gms/L, methylene bishiocyanate <2gms/L, (2-benzothiazolylthio) butanedioic acid <2gms/L.

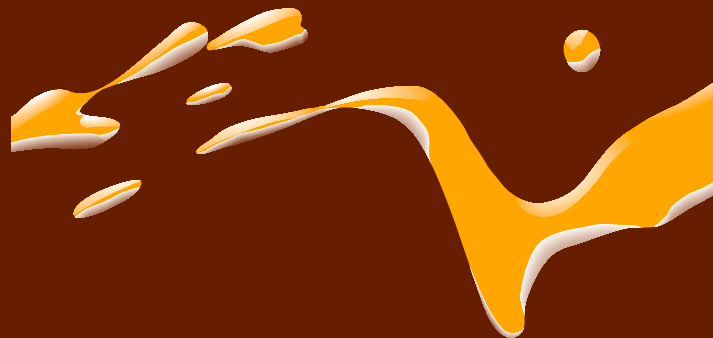
SPILLS: Use appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with Resene Brush Cleaner or mineral turps. Do not allow mineral turps to enter any drains. Refer to your local Council for disposal of dirty mineral turps.

IN CASE OF FIRE: Use foam, CO₂ dry chemical for extinction.

DANGER

KEEP OUT OF REACH OF CHILDREN

Resene**TimberLock**
preserver/conditioner
exterior

Resene TimberLock is a multi-functional timber treatment designed to increase the water, fungal and U.V. resistance of the wood surface itself, improving the performance of subsequently applied finishes. A penetrating material, it also has the ability to bond the wood fibres laid bare by U.V. and weather attack and re-build them into a wood-like material.

Preparation

- Ensure substrates to be coated are in sound condition, dry, free from dirt, dust, loose material, oil (including mineral oil based wood finishes or similar) and salt.
- Remove accumulated windblown salt by washing with Resene Paint Prep and Housewash (see Data Sheet D812).
- If mould is present, treat with Resene Moss & Mould Killer (see Data Sheet D80).
- Round all sharp timber edges.
- Remove any weakly adhering or flaking paint and sand back loose cellulose fibres. A second treatment with Resene Moss & Mould Killer, and further scraping and sanding, may be required on badly weathered surfaces.

All sanding dusts may be harmful and appropriate protection must be worn. In particular dusts from old lead or chromate based paints or old building materials containing asbestos may be injurious to health if inhaled or ingested. Seek expert advice if the presence of these materials is suspected.

- This product may be used to condition a wide variety of timber surfaces. If the surface you propose to coat is not referred to, contact your local Resene ColorShop or Reseller.

Application

- Resene TimberLock is recommended on Cedar, exterior timber, and for restoration of badly weathered timber surfaces. New timber should be treated with Resene TimberLock and primed before assembly. All faces of the timber should be treated with special attention to end grains.
- Saturate the surface with Resene TimberLock. The worst weathered surfaces will require a second application.
- Resene TimberLock will not penetrate existing coatings or very hard latewood bands. Wipe excess Resene TimberLock off with a dry, absorbent, lint free cloth rubbing along the grain. This will ensure maximum adhesion of topcoats.

Precautions

- Contains powerful fungicides. Avoid skin contact and wear gloves when wiping off any excess.
- Resene TimberLock will be less effective if the product is contaminated with water.
- Resene TimberLock must be topcoated with an appropriate system. Do not use under penetrating stains, such as Resene Waterborne Woodsman (see Data Sheet D57a).
- Maintain good ventilation throughout the drying and curing period to ensure the paint is properly cured. Poor ventilation may inhibit curing and performance.

Be PaintWise

For tips on minimising the impact of your decorating on the environment see the Resene website.

UN NO. 1263 PAINT
RELATED MATERIAL**FLAMMABLE LIQUID
AND VAPOUR**

Keep away from heat/sparks/open flames/
hot surfaces. Keep closed when not in use.
No smoking.



Resene
the paint the professionals use



In Australia: Resene Paints (Aust) Limited
7 Production Ave, PO Box 924, Beenleigh, Qld 4207
Phone 1800 738 383 Fax 1800 064 960
Email advice@resene.com.au or visit www.resene.com.au

In New Zealand: Resene Paints Limited
Vogel Street, PO Box 38242, Wellington Mail Centre, Lower Hutt 5045
Phone (04) 577 0500 Fax (04) 577 0600
Email advice@resene.co.nz or visit www.resene.co.nz

Manufactured under a quality system certified as complying with ISO9001 by Telarc SAI, an accredited certification body. Printed on environmentally responsible paper, which complies with the requirements of environmental management systems EMAS and ISO14001, using vegetable-based inks.

Quick check

Use on: Resene TimberLock preserver/conditioner is designed to fortify the surfaces of timber prior to the application of topcoats. It is especially useful on porous timber such as Cedar, as well as for the restoration of degraded timber surfaces.

Gloss level: None. Fully penetrating.

Coverage: New dressed timber is effectively treated at 10-12 square metres per litre per coat; badly weathered surfaces may take up to 3 square metres per litre per coat and may require a second application.

Dry time (minimum): 24 hours.

Recoat time (minimum): 24 hours. Drying is slowed by low temperatures and high humidity.

Primer required: No.

Usual number of coats: One. Badly weathered and rough sawn timber will require a second coat.

Application method: Brush, spray or roller.

Thinning and clean up: Do not thin. Clean up with mineral turps.

Before use: Stir well with a wide flat stirrer.

Enjoy the Resene Promise of Quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.