

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.

Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

KEEP OUT OF REACH OF CHILDREN

# Resene

## Summit Roof Metallic

### waterborne roof paint

exterior

A-LL1141304 10/23

#### SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. This material is quite bland; with vapour, occasional skin contact and even minor ingestion having negligible hazard. Repeated skin contact may, and any eye contact will, cause irritation. Harmful to aquatic life with long last effects.

#### PRECAUTIONS

USE WITH ADEQUATE VENTILATION. DO NOT EAT, DRINK OR SMOKE WHILE USING.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature. Avoid release to the environment.

#### FIRST AID

IF SWALLOWED: Rinse mouth. Call a POISON CENTRE, doctor, physician or first aider if you feel unwell.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing.

IF ON SKIN (or hair): Rinse skin with plenty of soap and water. If skin irritation or rash occurs get medical advice or attention.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation occurs get medical advice or attention.

When seeking medical advice take this container with you.

Further information can be obtained from  
AUST: POISONS INFORMATION CENTRE 131 126  
or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)  
or call Resene 0800 737 363.


For use as a decorative/protective coating.

For full technical instructions see Data Sheet D3155.

If using this product tinted to a Resene CoolColour™, see Data Sheet D3155C.

**SPILLS:** Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

**CLEANING PAINT EQUIPMENT:** Brush/roll out as much paint as possible onto newspaper before washing brushes and rollers. Dispose of wash-up water onto grassy/unsealed area or into inside sink/basin, NOT into outside stormwater drain where it may harm fish in local waterways.

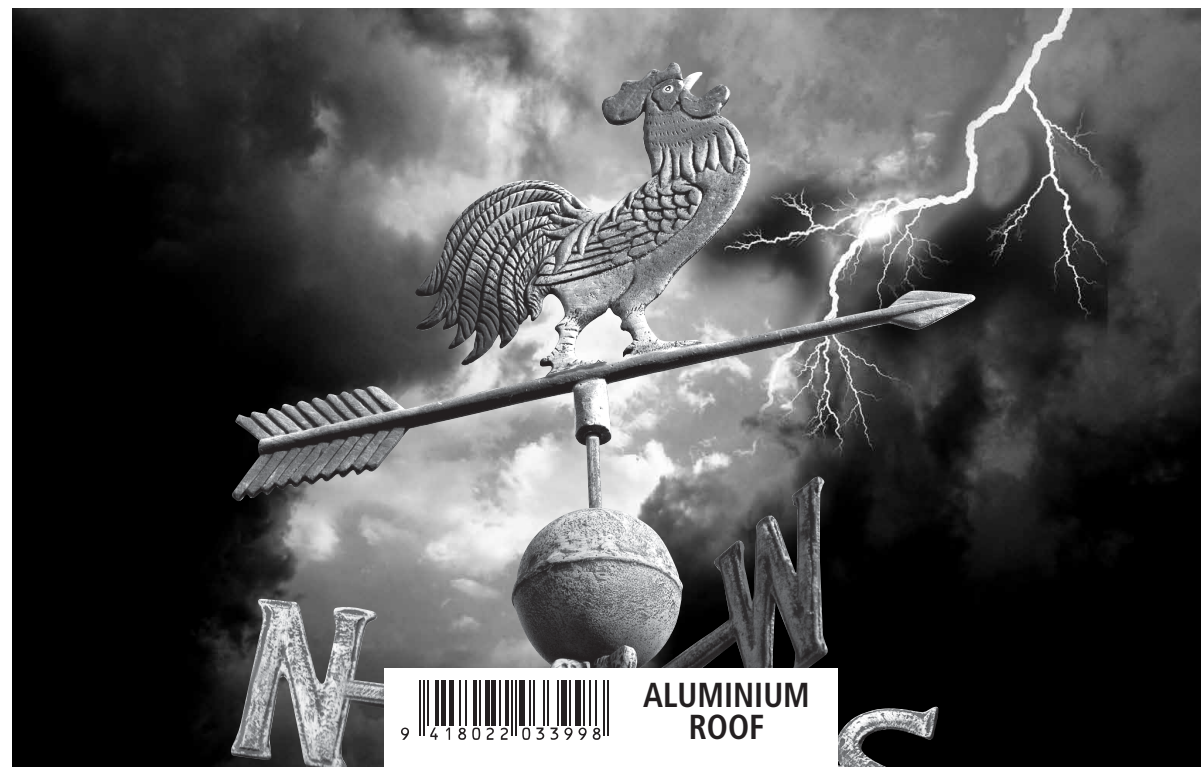

Resene Summit Roof is a unique waterborne metallic roof paint designed for ease of application and maximum life over properly prepared metal surfaces, well weathered COLORSTEEL® and COLORBOND® and properly prepared cementitious surfaces.

#### Preparation

- Ensure substrates to be coated are in sound condition, dry, free from dirt, dust, loose material, oil (including mineral oil-based wood finishes or similar) and salt.

- Remove accumulated windblown salt by washing with Resene Paint Prep and Housewash (see Data Sheet D812).

- Waterblasting is the best surface preparation prior to painting of weathered cementitious surfaces, galvanised steel and Zinalume.

- If mould is present, treat with Resene Moss & Mould Killer (see Data Sheet D80).

- Efflorescence on masonry **must be treated** (see Data Sheet D83).

- Wherever oil and grease are present and when painting galvanised steel or Zinalume, ensure the surface is thoroughly cleaned using Resene Roof and Metal Wash (see Data Sheet D88). Flush clean with water.

- Disconnect downpipes until after the first heavy shower of rain before using for collection of drinking water. Ensure the run-off is diverted onto a garden or grassed area.

- Ensure cementitious surfaces are fully cured, or treated with Resene Limelock (see Data Sheet D809), before coating. Under cured cementitious surfaces can significantly affect the performance and colourfastness of applied paint.

- **All sanding dusts may be harmful and appropriate protection should be worn. In particular dusts from old lead or chromate-based paints or old building materials containing**

**asbestos may be injurious to health if inhaled or ingested. Seek expert advice if the presence of these materials is suspected.**

- Consult your Resene ColorShop or reseller for technical advice on painting of old cementitious roof tiles or if painting weathered galvanised steel and Zinalume or if corrosion is present.

- This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsound or not referred to, try a small test area first or contact your local Resene ColorShop or reseller for advice.

#### Priming

- Galvanised steel or Zinalume does not need to weather prior to painting. Apply one coat of Resene Galvo One (see Data Sheet D41) or Resene Galvo-Prime (see Data Sheet D402) as soon as possible. If the galvanised steel or Zinalume has weathered for more than 6 months use only Resene Galvo One.

- Wash new unweathered coloured steel, such as COLORSTEEL® or COLORBOND®, with Resene Heavy Duty Paint Prep and Oil Remover, then prime with Resene Pre-Coated Steel Primer (see Data Sheet D413) before topcoating.

- When repainting spot prime all bare areas with one coat of Resene Galvo One. Resene Galvo One is best applied by brush to ensure full surface wetting of substrate is achieved.

- Prime old unpainted fibre cement or plaster with Resene Sureseal (see Data Sheet D42). Prime with Resene Quick Dry (see Data Sheet D45).

- If due to climatic conditions foam persists after rolling, add 5% Resene Hot Weather Additive to Resene Galvo-Prime, roll on and lay off with a brush. Foam craters create weak spots in the protective system.

#### Application

- Application differs from standard Resene Summit Roof. Please ask Resene staff for directions if you have not applied this product previously.

- Apply two coats in the required colour allowing dry time between coats.

- Maintain good ventilation throughout the drying and curing period to ensure the paint is properly cured. Poor ventilation may inhibit curing and performance.

#### Maintenance

(after a minimum of four weeks' drying)  
See the Resene Caring for your paint finish brochure or the Resene website for full cleaning instructions.

#### Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.



Summit Roof SDS

# Resene

the paint the professionals use



Summit Roof Metallic TDS

In Australia: Resene Paints (Aust) Limited  
7 Production Ave, PO Box 918, Ashmore City, QLD 4214  
Ph 1800 738 383 Visit [resene.com.au](http://resene.com.au)

In New Zealand: Resene Paints Limited  
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045  
Ph (04) 577 0500 Visit [resene.co.nz](http://resene.co.nz)

#### Quick check

**Use on:** Properly prepared metal surfaces, well weathered (6 months or more exterior exposure) COLORSTEEL® and COLORBOND® and properly prepared cementitious surfaces.

**Gloss level:** Metallic.

**Coverage:** 12 square metres per litre per coat.

The spreading rate recommended for this product will achieve hiding in two coats for most colours. Increased spreading rates can be used but additional coats may be needed to achieve hiding. See the Resene website for more information.

**Dry time (minimum):** 45 minutes. Do not apply at temperatures below 10°C or when temperatures are liable to drop below this during the drying period. Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions.

**Recoat time (minimum):** 3 hours.

**Primer required:** Yes, Resene Galvo One, Resene Galvo-Prime or Resene Quick Dry for cementitious surfaces.

**Usual number of coats:** Two. Bright colours may require an additional coat.

**Application method:** Brush, roller or spray. Spraying metallic colours will require a professional applicator using a LTX 517 tip and 30 mesh filter.

**Thinning:** In hot conditions may be thinned with up to 5% Resene Hot Weather Additive to slow drying.

**Clean up:** Water.

**Colour range:** Selected Resene Total Colour System colours.

Colours in the Resene Summit Roof range are selected for maximum colour stability under harsh roof conditions.

**Before use:** Stir well with a wide flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.