

net contents 1 litre

Must be mixed with Resene ArmourCat Hardener in the correct volume ratio.

LLACAL01 12/13

WARNING

Read label before use. Keep out of reach of children. Harmful if swallowed. Harmful in contact with skin. Causes skin irritation. May cause an allergic skin reaction. Suspected of causing cancer. Suspected of damaging fertility or the unborn child. Suspected of damaging organs through prolonged or repeated exposure. Causes serious eye damage.

PRECAUTIONS

DO NOT BREATHE FUMES/MISTS/SPRAYS/VAPOURS. USE WITH ADEQUATE VENTILATION. DO NOT EAT, DRINK OR SMOKE WHILE USING. Do not handle until all safety precautions have been read and understood. Store in original or correctly labeled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, either between 15°C-20°C or at a cool, constant temperature. Store locked up. Ground/bond container and receiving equipment. Use explosion-proof electrical/ventilating/lighting equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Wash thoroughly after handling. Wear protective gloves and face/eye protection and respiratory protection. Dispose of empty container safely. Consult Resene checklist on environmentally acceptable methods for cleaning equipment and disposing of unwanted paint. Do not contaminate any water supply.

FIRST AID

IF SWALLOWED: Do NOT induce vomiting. Rinse mouth. Call a POISON CENTRE or doctor/physician if you feel unwell.

IF ON SKIN (or hair): Wash with plenty of soap and water. If skin irritation occurs get medical advice. Take off contaminated clothing and wash before re-use.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do so. Continue rinsing.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing.

When seeking medical advice take this container with you.

If exposed or concerned: Call a POISON CENTRE or doctor/physician. Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126

or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)

or call Resene 0800 737 363.

CONTAINS: Liquid Hydrocarbons 280-310 gms/L, butylated urea formaldehyde resin 155-170 gms/L, 1-butanol 130-140 gms/L.

For use as a decorative/protective coating.

For full technical instructions see Data Sheet RA84.

SPILLS: Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with the recommended thinner. Do not allow thinner to enter any drains. Refer to your local Council for disposal of dirty thinner.

FIRE: Use foam, carbon dioxide or dry chemical powder.

DANGER

KEEP OUT OF REACH OF CHILDREN


Resene

ArmourCat 810

metallic effects

base

Engineered Coating Systems

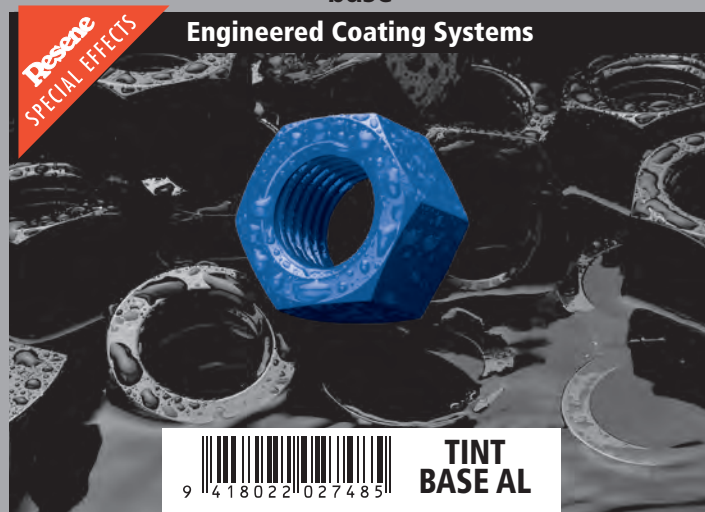

TINT
BASE AL

Resene ArmourCat 810 is a two pack, acid-catalysed finish formulated to produce metallic and special effects. May be overcoated with either Resene ArmourCat or DuraGloss clear finishes for enhanced wear and appearance.

General

- Safety Data Sheet (SDS) is available and must be consulted before use.
- In every case it is recommended that the current Resene Data Sheet is consulted for product data and surface preparation information.

- This product comprises a Base and Hardener, which must be mixed in the required ratio using an air or explosion-proof power mixer before application. Mix each component separately before blending them together. Add the total contents of the Hardener container to the total contents of the Base container. Once uniformly mixed, allow to stand for the recommended induction time prior to re-mixing and use.
- Thinning requirements may vary according to application method, equipment and environmental conditions.

- If thinning is required add recommended thinner after components have been blended and thoroughly re-mix using the power mixer.

- Ensure correct wet film thickness is applied to achieve desired dry film thickness. Allowance must be made for any thinner added.
- Use of incorrect thinner may have an adverse effect on application and performance.

- Drying is affected by low temperatures and high humidity.
- Ensure that the mixed product is used within the stated pot life. The pot life of the mixed product is given for a specific temperature. Higher temperatures will reduce the pot life, conversely lower temperatures will increase it.

- The temperature of the substrate should be 3°C above the "Dew Point".
- The "Dew Point" requirement can be presumed to be satisfied if a thin clearly defined film of water applied to the cleaned surface with a damp cloth evaporates within 15 minutes.

- Following appropriate preparation, all surfaces must be dry and clean prior to painting.

- This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsound

or not referred to, contact your local Resene ColorShop or Reseller for your nearest Technical Representative.

Be PaintWise

For tips on minimising the impact of your decorating on the environment see the Resene website.



UN NO. 1263 - PAINT RELATED MATERIAL

FLAMMABLE LIQUID AND VAPOUR

Keep away from heat/sparks/open flames/
hot surfaces. No smoking.



Resene

the paint the professionals use



In Australia: Resene Paints (Aust) Limited
7 Production Ave, PO Box 924, Beenleigh, Qld 4207
Phone 1800 738 383 Fax 1800 064 960
Email advice@resene.com.au or visit www.resene.com.au

In New Zealand: Resene Paints Limited
Vogel Street, PO Box 38242, Wellington Mail Centre, Lower Hutt 5045
Phone (04) 577 0500 Fax (04) 577 0600
Email advice@resene.co.nz or visit www.resene.co.nz

Manufactured under a quality system certified as complying with ISO9001 by Telarc SA, an accredited certification body. Printed on environmentally responsible paper, which complies with the requirements of environmental management systems EMAS and ISO14001, using vegetable-based inks.

Quick check

Name: Resene ArmourCat 810.

Generic type: Acid catalysed alkyd urea resin system.
Colours: Metallic effects, including the Resene Metallics and Special Effects colour chart.

Finish: Aluminium: semi-gloss; Blast Grey: satin.

Sealer/undercoat required: Resene ArmourCat 805 (New MDF/Wood).

Application method: Spray application only – refer Resene Automotive before commencing work.

Mixing ratio: 10 parts Base: 1 part Hardener (by volume).

Induction time: 5-15 minutes.

Pot life: 8 hours at 18°C. Increased temperatures will shorten pot life.

Volume solids: (Mixed, unthinned) Aluminium: 40%; Blast Grey: 46%.

Theoretical coverage: 10 square metres per litre per coat. Coverage rates will vary according to substrate porosity.

Dry time (minimum): Tack free: 10-15 mins at 18°C.

To handle: 2 hours at 18°C.

Full cure: 7 days at 18°C.

Drying is affected by low temperatures and high humidity

Recoat: ArmourCat Clear: Min: 2 hours at 18°C;

Max: 7 days at 18°C

Duragloss Clear: Min: 6 hours at 18°C;

Max: 7 days at 18°C.

Thinning and clean up: Resene Thinner No.16.

Resene Data Sheet: RA85.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.