

net contents 800ml

Must be mixed with the appropriate hardener.
Makes 1 litre when mixed with 200ml of Resene ArmourZinc
120 Hardener.

LL5810001B 9/13

WARNING

Read label before use. Keep out of reach of children. Harmful if swallowed. Causes skin irritation. Causes eye irritation. May cause an allergic skin reaction. May damage fertility or the unborn child. Suspected of damaging organs through prolonged or repeated exposure. Very toxic to the aquatic environment with long lasting effects.

PRECAUTIONS

DO NOT BREATHE DUSTS/FUMES/GAS/MISTS/VAPOURS/SPRAYS. USE WITH ADEQUATE VENTILATION. DO NOT EAT, DRINK OR SMOKE WHILE USING. Do not handle until all safety precautions have been read and understood. Store in original or correctly labelled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, either between 15°C-20°C or at a cool, constant temperature. Store locked up. Ground/bond container and receiving equipment, as product is volatile and may generate a hazardous atmosphere. Take precautionary measures against static discharge. Use explosion proof electrical/ventilating/lighting and other equipment. Use only non-sparking tools. Wear protective gloves and eye/face protection and any other personal protective equipment as required. Do not allow contaminated clothing out of the workplace. Wash thoroughly after handling. Avoid release to the environment. Collect spillage. Dispose of empty container safely. Consult Resene checklist on environmentally acceptable methods for cleaning.

FIRST AID

IF SWALLOWED: Rinse mouth. Do NOT induce vomiting.
IF ON SKIN (or hair): Remove/take off all contaminated clothing and wash before re-use. Wash skin with plenty of soap and water/shower. If skin irritation or rash occurs get medical advice/attention.
IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do so. Continue rinsing. If eye irritation persists: get medical attention/advice.
IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing.
If exposed or concerned: get medical advice/attention.
If medical attention is required: have product container or label at hand.
Further information can be obtained from
AUST: POISONS INFORMATION CENTRE 131 126 or call Resene 1800 738 383.
NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766) or call Resene 0800 737 363.
CONTAINS: Xylene 195-215 gms/L, Epoxy resin 145-155 gms/L, Aromatic hydrocarbon 45-50 gms/L.
For use as a decorative/protective coating.
For full technical instructions see Data Sheet RA22.

SPILLS: Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with the recommended thinner. Do not allow thinner to enter any drains. Refer to your local Council for disposal of dirty thinner.

IN CASE OF FIRE: Use dry powder, CO₂ or foam for extinction.

DISPOSAL INFORMATION

CONTAINER: Triple rinse or equivalent, Render the container incapable of holding other product and offer for disposal to local sanitary landfill.
PRODUCT: Render the product non-hazardous by allowing the solvent to evaporate and the film to dry to a non-hazardous state. Non-hazardous product can then be passed in at local sanitary landfill.
Do NOT dispose of product, cleaning discharge or containers into lakes, streams, ponds, estuaries, oceans, other waterways, sewers.

DANGER

KEEP OUT OF REACH OF CHILDREN


Resene

ArmourZinc 120

zinc epoxy primer

base

Engineered Coating Systems

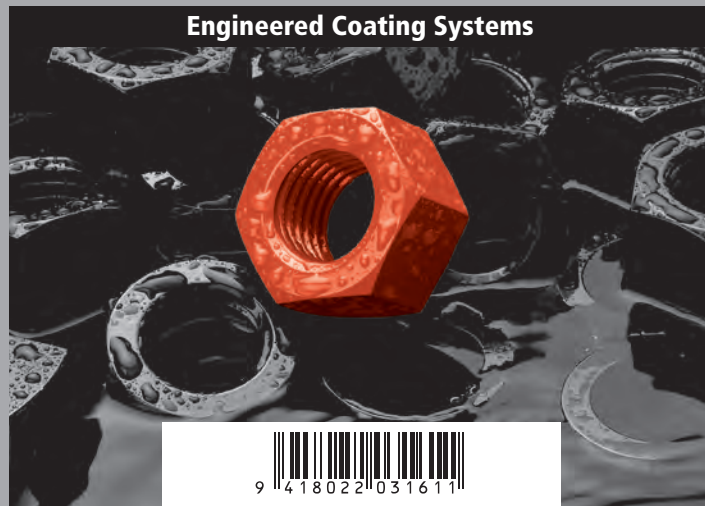

Resene ArmourZinc 120 is a tough, abrasion resistant film that bonds strongly to steel, inorganic zinc and existing epoxy surfaces. Zinc content of the coating gives steel cathodic protection if the film is damaged. Rapid drying and topcoating allows for early handling of steel when used as a shop primer or on site applications.

General

- Safety Data Sheet (SDS) is available and must be consulted before use.
- In every case it is recommended that the current Resene Data Sheet is consulted for product data, application guidelines and surface preparation information.
- This product comprises a Base and Hardener, which must be mixed in the required ratio before application, preferably add the total contents of the Hardener container to the total contents of the Base container.
- Efficient mixing at all stages requires power mixing with an air or explosion proof mixer until uniformly blended.
- Each component should be separately mixed before blending.
- Blend components together by stirring, until uniformly mixed and then allow to stand for the recommended induction time.
- After the induction period re-mix before application.
- Thinning requirements may vary according to application method, equipment and environmental conditions. Excessive thinning will reduce the dry film build and may result in the appearance of runs or sags in the coating.
- If thinning is required add recommended thinner after components have been blended and thoroughly re-mix using the power mixer.
- Ensure correct wet film thickness is applied to achieve desired dry film thickness. Allowance must be made for any thinner added.
- Use of incorrect thinner may have adverse effect on application and performance.
- Drying is affected by low temperatures and high humidity.
- Ensure that the mixed product is used within the stated pot life. The pot life of the mixed product is given for a specific temperature. Higher temperatures will reduce the pot life, conversely lower temperatures will increase it.
- The temperature of the substrate should be 3°C above the "Dew Point".
- The "Dew Point" requirement can be presumed to be satisfied if a thin clearly defined film of water applied to the cleaned surface with a damp cloth evaporates within 15 minutes.
- Following appropriate preparation, all surfaces must be dry and clean prior to painting.
- This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsound or not referred to, try a small test area first or contact your local Resene ColorShop or Reseller for your nearest Technical Representative.

Maintenance

(after a minimum of four weeks' drying)

See the Resene Caring for your paint finish brochure for full cleaning instructions or the Resene website.

Be PaintWise

For tips on minimising the impact of your decorating on the environment see the Resene website.



UN NO. 1263 - PAINT
RELATED MATERIAL

FLAMMABLE LIQUID AND VAPOUR

Keep away from ignition sources such as heat/
sparks/open flame/hot surfaces. No smoking.



Resene
the paint the professionals use



In Australia: Resene Paints (Aust) Limited

7 Production Ave, PO Box 924, Beenleigh, Qld 4207

Phone 1800 738 383 Fax 1800 064 960

Email advice@resene.com.au or visit www.resene.com.au

In New Zealand: Resene Paints Limited

Vogel Street, PO Box 38242, Wellington Mail Centre, Lower Hutt 5045

Phone (04) 577 0500 Fax (04) 577 0600

Email advice@resene.co.nz or visit www.resene.co.nz

Manufactured under a quality system certified as complying with ISO9001 by Telarc, an accredited certification body. Printed on environmentally responsible paper, which complies with the requirements of environmental management systems EMAS and ISO14001, using vegetable-based inks.

Quick check

Name: Resene ArmourZinc 120.

Generic type: Two-component zinc epoxy primer.

Colour: Green.

Finish: Matt.

Primer required: No.

Application method: Conventional or airless spray.

Mixing ratio: 4 parts Base: 1 part Hardener (by volume).

Induction time: 10-15 minutes.

Pot life: 24 hours at 21°C. Increased temperatures will shorten pot life.

Recommended dry film thickness (D.F.T.): 75 microns.

(A film thickness of 20 microns is recommended when a period of exterior exposure is envisaged without topcoat application).

Theoretical coverage: 6.75 square metres per litre at 75 microns D.F.T.

Dry time (minimum): Touch dry: 20 minutes at 21°C. 30 minutes at 10°C. Through dry: 30 minutes at 21°C. 60 minutes at 10°C. Drying is affected by low temperatures and high humidity.

Recoat time (minimum): 3 hours at 21°C.

Thinning and clean up: Resene Thinner No.12.

Resene Data Sheet: RA22.

Epoxies and polyaminoamides have been known to cause dermatitis and usual precautions to avoid skin contact should be taken.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. When using multiple packs of this product on the same project please mix them together before use. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.